

Tablă pentru cofraj pierdut amprentată pentru aderența betonului, cu armatură






Floors with collaborating plates with struts and negative reinforcement

Megerősített lemezes födémekek megtámasztással és negatív kötéssel

Tavanice sa kompozitnim limom sa potpornim stubičima i negativnom armaturom

Подове с композитни листове с подпори и отрицателна армировка

EGB 210 H=10 cm

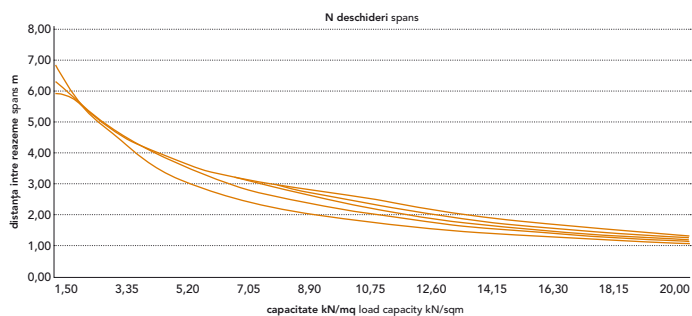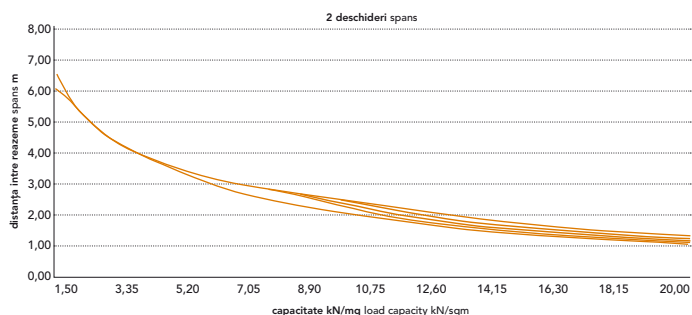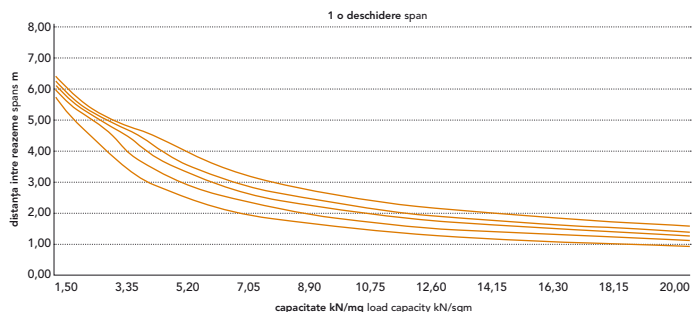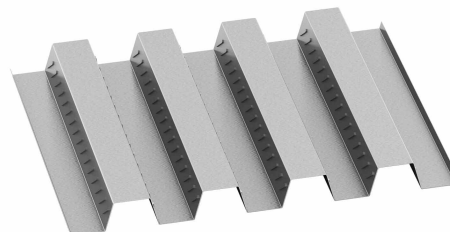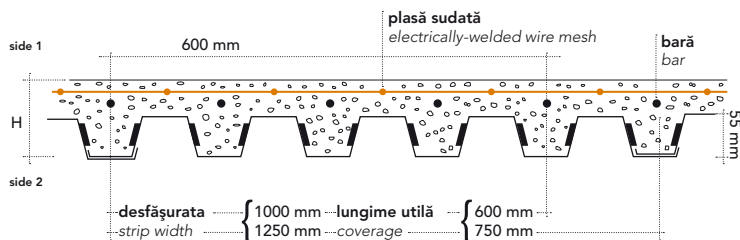

EGB 210 H=10 cm

Caracteristici ale profilului Section properties

| Grosime Thickness mm | Greutate Weight kg/m ² | Greutate Weight kg/m | |
|-------------------------|--------------------------------------|-------------------------|-------|
| | | 1000 | 1250 |
| 0,7 | 9,16 | 5,50 | 6,87 |
| 0,8 | 10,47 | 6,28 | 7,85 |
| 1,0 | 13,08 | 7,85 | 9,81 |
| 1,2 | 15,70 | 9,42 | 11,78 |

CARACTERISTICI

Characteristics

Tulajdonságok

Karakteristike

Характеристики

Plasă sudată de \varnothing 6 mm pasul 150x150 mm

Bară de întărire \varnothing 8 mm

Grid \varnothing 6 mm welded mesh 150x150 mm

Reinforcement bar \varnothing 8 mm

Háló \varnothing 6 mm hegesztett szemekkel 150x150 mm

Merevítővas \varnothing 8 mm

Mreža \varnothing 6 mm sa zavarenim okcima 150x150 mm

Potporna šipka \varnothing 8 mm

\varnothing 6 mm заварена мрежа 150x150 mm

Арматурен прът \varnothing 8 mm

| EGB 210 H=10 cm | | | | | | | | | | | | | | | | ▲ ▲ 1 o deschidere 1 span | |
|-------------------|--|------|------|------|------|------|------|------|------|------|------|------|-------|-------|-------|---------------------------|--|
| Grosime Thickness | Încărcare utilă, uniform distribuită kN/m ² - Useful working overload, uniformly distributed (kN/m ²) | | | | | | | | | | | | | | | | |
| mm | 1,50 | 2,00 | 2,50 | 3,00 | 3,50 | 4,00 | 4,50 | 5,00 | 5,50 | 6,00 | 7,00 | 8,00 | 10,00 | 12,00 | 15,00 | 20,00 | |
| | Distanța maximă între reazeme pentru planșee - Maximum span in m for floors | | | | | | | | | | | | | | | | |
| 0,7 | 5,68 | 5,00 | 4,47 | 3,99 | 3,50 | 3,13 | 2,85 | 2,61 | 2,42 | 2,26 | 2,01 | 1,81 | 1,53 | 1,34 | 1,15 | 0,94 | |
| 0,8 | 5,95 | 5,41 | 5,02 | 4,62 | 4,07 | 3,65 | 3,32 | 3,06 | 2,84 | 2,66 | 2,37 | 2,14 | 1,82 | 1,60 | 1,37 | 1,13 | |
| 1,0 | 6,09 | 5,53 | 5,14 | 4,83 | 4,53 | 4,08 | 3,72 | 3,43 | 3,20 | 3,00 | 2,68 | 2,43 | 2,08 | 1,83 | 1,58 | 1,31 | |
| 1,2 | 6,21 | 5,64 | 5,24 | 4,93 | 4,68 | 4,39 | 4,01 | 3,71 | 3,45 | 3,24 | 2,90 | 2,64 | 2,26 | 1,99 | 1,72 | 1,43 | |

| EGB 210 H=10 cm | | | | | | | | | | | | | | | | ▲ ▲ ▲ 2 deschideri 2 spans | |
|-------------------|--|------|------|------|------|------|------|------|------|------|------|------|-------|-------|-------|----------------------------|--|
| Grosime Thickness | Încărcare utilă, uniform distribuită kN/m ² - Useful working overload, uniformly distributed (kN/m ²) | | | | | | | | | | | | | | | | |
| mm | 1,50 | 2,00 | 2,50 | 3,00 | 3,50 | 4,00 | 4,50 | 5,00 | 5,50 | 6,00 | 7,00 | 8,00 | 10,00 | 12,00 | 15,00 | 20,00 | |
| | Distanța maximă între reazeme pentru planșee - Maximum span in m for floors | | | | | | | | | | | | | | | | |
| 0,7 | 6,01 | 5,49 | 4,91 | 4,48 | 4,15 | 3,88 | 3,66 | 3,44 | 3,19 | 2,97 | 2,63 | 2,38 | 2,01 | 1,72 | 1,38 | 1,03 | |
| 0,8 | 6,34 | 5,49 | 4,91 | 4,48 | 4,15 | 3,88 | 3,66 | 3,47 | 3,31 | 3,17 | 2,94 | 2,72 | 2,18 | 1,81 | 1,45 | 1,09 | |
| 1,0 | 6,34 | 5,49 | 4,91 | 4,48 | 4,15 | 3,88 | 3,66 | 3,47 | 3,31 | 3,17 | 2,94 | 2,75 | 2,30 | 1,91 | 1,53 | 1,15 | |
| 1,2 | 6,34 | 5,49 | 4,91 | 4,48 | 4,15 | 3,88 | 3,66 | 3,47 | 3,31 | 3,17 | 2,94 | 2,75 | 2,42 | 2,01 | 1,61 | 1,21 | |

| EGB 210 H=10 cm | | | | | | | | | | | | | | | | ▲ ▲ ▲ ▲ N deschideri N spans | |
|-------------------|--|------|------|------|------|------|------|------|------|------|------|------|-------|-------|-------|------------------------------|--|
| Grosime Thickness | Încărcare utilă, uniform distribuită kN/m ² - Useful working overload, uniformly distributed (kN/m ²) | | | | | | | | | | | | | | | | |
| mm | 1,50 | 2,00 | 2,50 | 3,00 | 3,50 | 4,00 | 4,50 | 5,00 | 5,50 | 6,00 | 7,00 | 8,00 | 10,00 | 12,00 | 15,00 | 20,00 | |
| | Distanța maximă între reazeme pentru planșee - Maximum span in m for floors | | | | | | | | | | | | | | | | |
| 0,7 | 5,93 | 5,77 | 5,16 | 4,71 | 4,27 | 3,82 | 3,46 | 3,18 | 2,94 | 2,74 | 2,43 | 2,19 | 1,85 | 1,61 | 1,37 | 1,07 | |
| 0,8 | 6,33 | 5,92 | 5,30 | 4,84 | 4,48 | 4,19 | 3,95 | 3,69 | 3,42 | 3,20 | 2,84 | 2,57 | 2,17 | 1,87 | 1,49 | 1,12 | |
| 1,0 | 6,84 | 5,92 | 5,30 | 4,84 | 4,48 | 4,19 | 3,95 | 3,75 | 3,57 | 3,42 | 3,17 | 2,89 | 2,37 | 1,97 | 1,58 | 1,18 | |
| 1,2 | 6,84 | 5,92 | 5,30 | 4,84 | 4,48 | 4,19 | 3,95 | 3,75 | 3,57 | 3,42 | 3,17 | 2,96 | 2,49 | 2,07 | 1,66 | 1,24 | |